




R&D 50 Hz GPS CAN Sensor User Manual

Generation 1

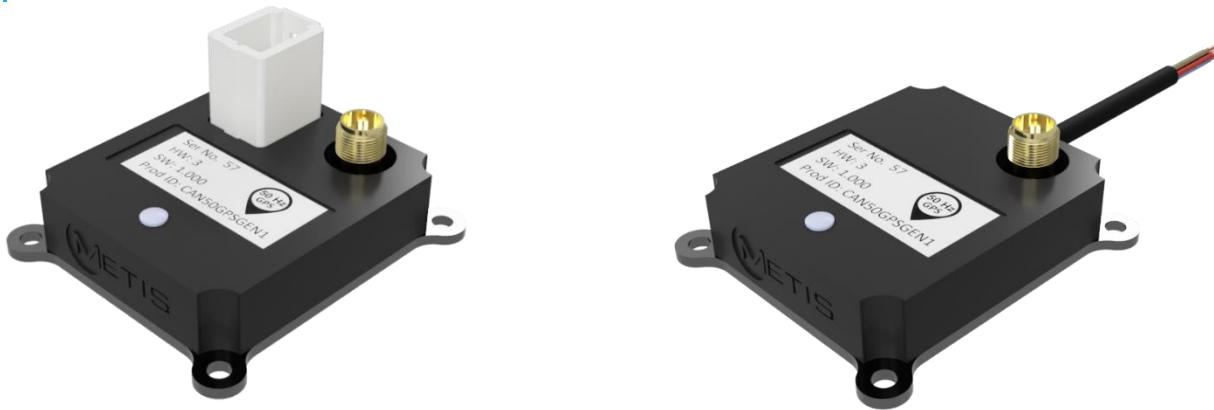

Joe Holdsworth
7-18-2021

Revision History

Revision	Comment	Author	Date
0.1	Creation of Document and first issue	Joe Holdsworth	07/06/2021
1.0	Released	Joe Holdsworth	18/07/2021
2	Updated input voltage range	Claire Bishop	26/02/2024

R&D 50 Hz GPS CAN Sensor User Manual

Contents

System Overview	4
Unit Recommended Settings?	5
Max and Min Values.....	6
Sensor	6
Environmental.....	6
Electrical	7
Connection.....	7
Electrical.....	8
Mating Connector	8
Crimps	8
CAN Termination	8
Mechanical	9
Mounting	9
JWPF Dimensions	10
Pigtail Dimensions	11
Installation.....	12
Sensor Calibration.....	13
Calibration.....	13
Status LED.....	13
CAN Interface.....	14
Quick Start Guide	14
Step 1: Power Up Unit	14
Step 2: Connect CAN Tool.....	14
Step 3: What you should see	14
Step 4: Enter Setup mode.....	15
Step 5: Save Setup	15
Step 6: Reset to factory defaults.....	16
CAN Message Format.....	17
CAN Message Summary.....	17
GPS 50 Config (0x31E[default]).....	18
Configuration CAN Message	18
Common CAN Message Types	19
Heartbeat (0x00_Heartbeat)	20
Enter Setup Command (0x01_Cmd_Enter_Setup)	20
Save Setup Command (0x02_Cmd_Save_Setup)	20
Cancel Setup Command (0x03_Cmd_Cancel_Setup)	21
Reset Unit To Factory Default Settings (0x04_Cmd_Rst_to_Factory_Defaults).....	21
Get CAN Bus Speed (0x05_Cmd_Get_CAN_Bus_Speed).....	21

R&D 50 Hz GPS CAN Sensor User Manual

Set CAN Bus Speed (0x06_Cmd_Set_CAN_Bus_Speed).....	21
Received CAN Bus Speed (0x07_Resp_CAN_Bus_Speed).....	22
Get CAN start address (0x08_Cmd_Get_CAN_Start_Address)	22
Set CAN start address (0x09_Cmd_Set_CAN_Start_Address)	23
Received CAN Start Address (0x0A_Resp_CAN_Start_Address).....	23
Reboot Device (0x0E_Cmd_Reboot_Device)	23
Get Software Version (0x0F_Cmd_Get_Software_Version)	24
Software Version Response (0x10_Resp_Software_Version)	24
GPS 50 Settings	25
Get Position Update Rate (x30_Cmd_Get_Pos_Update_Rate_Hz)	25
Set Position Update Rate (x31_Cmd_Set_Pos_Update_Rate_Hz)	25
Position Update Rate Response (x32_Resp_Pos_Update_Rate_Hz)	25
Get Lat Long CAN message output on or off (x3F_Cmd_Get_Lat_Lon_On).....	26
Set Lat Long CAN message output on or off (x40_Cmd_Set_Lat_Lon_On).....	26
Lat Long CAN message output on or off Response (x41_Resp_Lat_Lon_On)	26
Get SOG and COG CAN message output on or off (x42_Cmd_Get_Alt_SOG_COG_On)	27
Set SOG and COG CAN message output on or off (x43_Cmd_Set_Alt_SOG_COG_On)	27
SOG and COG CAN message output on or off Response (x44_Resp_Alt_SOG_COG_On).....	27
Get Date Time CAN message output on or off (x45_Cmd_Get_Date_Time_On).....	28
Set Date Time CAN message output on or off (x46_Cmd_Set_Date_Time_On)	28
Get Hours Offset (x54_Cmd_Get_Hrs_Offset)	29
Set Hours Offset (x55_Cmd_Set_Hrs_Offset)	29
Hours Offset Response (x56_Resp_Hrs_Offset)	29
GPS50_Lat_Long (0x31F [default])	30
GPS50_AltSpeedCOG (0x320 [default]).....	31
GPS50_Date_Time (0x321 [default])	32
List of Tables	33
List of Figures	34

R&D 50 Hz GPS CAN Sensor User Manual

System Overview

This standalone CAN based GPS/GNSS High Position Update Rate sensor outputs date and time, latitude, longitude, altitude, Course Over Ground and speed at up to 50Hz.

The configurable CAN interface allows the unit to attach to almost any CAN bus. It features either a 6 pin IP67 connector or a 300mm pig tail connector and a SMA for an external active or passive GPS/GNSS antenna. The wide-ranging input voltage and the small size and mass of the unit allows easy interface into most vehicles.

R&D 50 Hz GPS CAN Sensor User Manual

Unit Recommended Settings?

Although this unit is capable of a 50Hz update rate, 20Hz is the recommended and default rate, this gives the unit more time to converge to a solution and is therefore typically much more accurate in position estimates.

R&D 50 Hz GPS CAN Sensor User Manual

Max and Min Values

Sensor

Position accuracy	CEP (50%)	2.5	m
Acquisition	Cold starts	29	s
	Aided starts	28	s
	Reacquisition	1	s
Number of concurrent GNSS	GPS/QZSS L1 C/A + SBAS		
Position/COG/Speed Update Rate	1 / 2 / 4 / 5 / 10 / 20 (default) / 25 / 40 / 50 Hz		
Environment	Operating temperature	-20 to +80	°C
	Dust and Water Ingress	IP6X	
Mechanical Shock (Max Values)	Duration < 200µs	10000	g
	Duration < 1ms	2000	g
	Free Fall Distance	1.8	m

TABLE 1 SENSOR PERFORMANCE

Environmental

Environment	Operating temperature	-40 to +80	°C
	Dust and Water Ingress	IP65	
Mechanical Shock (Max Values)	Duration < 200µs	10000	G
	Duration < 1ms	2000	G
	Free Fall Distance	1.8	M

TABLE 2 ENVIRONMENTAL PERFORMANCE INFORMATION

R&D 50 Hz GPS CAN Sensor User Manual

Electrical

CAN [3]	Baud Rates	1000, 500, 250	Kbps
	Address Range[4]	1 (0x01) to 2042 (0x7FA). Default = 0x31E	decimal (Hex)

Power	Voltage Range	9-16	V
	Current (Sleep)	110 (10mA)	mA @ 12V
Input Pins	Voltage Range	2-28	V

TABLE 3 ELECTRICAL PERFORMANCE

Connection

Cable Variant (standard is 300mm in length)		
AWG	26	
Wire Spec	Raychem 55	
Cable Jacket	TE Flame Retardant -75 to +150 °C	
OD	3.1mm +-0.1mm	
Connector Variant		
On Unit	B06B-JWPF-SK-R	
Mating [5]	06R-JWPF-VSLE-D	
Crimp	SWPR-001T-P025	
Pin Outs		
Wire Colour	Pin No.	Function
Brown	1	Ignition/wakeup [6]
Red	2	Supply Voltage
Black	3	Ground
Green	4	CAN High
White	5	CAN Low
Yellow	6	Factory Reset [7]

TABLE 4 CONNECTION INFORMATION

[1] The default settings are 1000kbps and start address 0x31E, the unit has no CAN termination.

[2] The unit uses 4 CAN address which are in consecutive order from address that the unit is set to.

[3] This connector is not supplied with the unit.

[4] By default this mode is switched off, if it is enabled connect this pin to 2.5v to supply voltage to wake unit.

[5] To reset the unit to factory settings pull this from 2.5v to supply voltage on unit power up.

Electrical

Mating Connector

Part No.: 06R-JWPF-VSLE-D

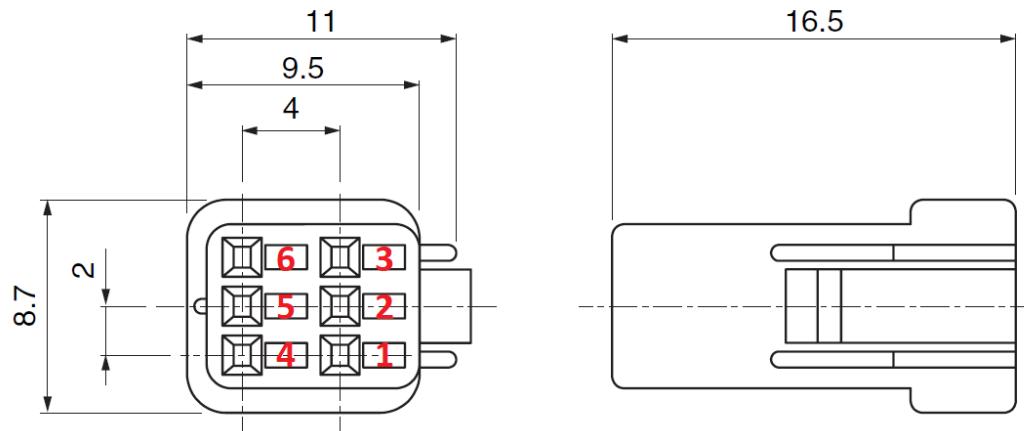



FIGURE 1 MATING CONNECTOR PIN NUMBERING (TOP DOWN VIEW)

Crimps

Crimp Part No.: SWPR-001T-P025

Crimp Tool Part No.: WC-JWPF

12" Pre-Crimped Cable Part No.: AJWPFJWPF22K305R

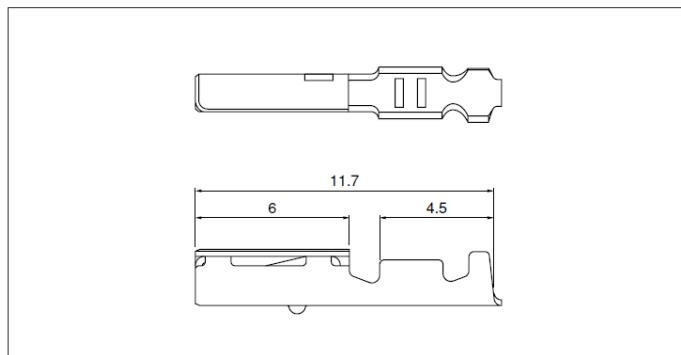

Model No.	Applicable wire		Insulation O.D (mm)	Q'ty / reel
	mm ²	AWG#		
SWPR-001T-P025	0.13~0.33	26~22	1.4~1.7	8,200
Material and Finish				
Copper alloy, tin-plated (reflow treatment)				
RoHS compliance				
Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SWPR-001T-P025	AP-K2N	MKS-L	MK/SWPR/T-001-025	APLMK SWPR/T001-025
		—	—	—

FIGURE 2 CONNECTOR CRIMP DETAILS

CAN Termination

The unit does not have a termination resistor.

R&D 50 Hz GPS CAN Sensor User Manual

Mechanical

Mounting

Mount using 4 x M2.5 bolts and washer to protect between the bolt and anodized aluminum base.

R&D 50 Hz GPS CAN Sensor User Manual

JWPF Dimensions

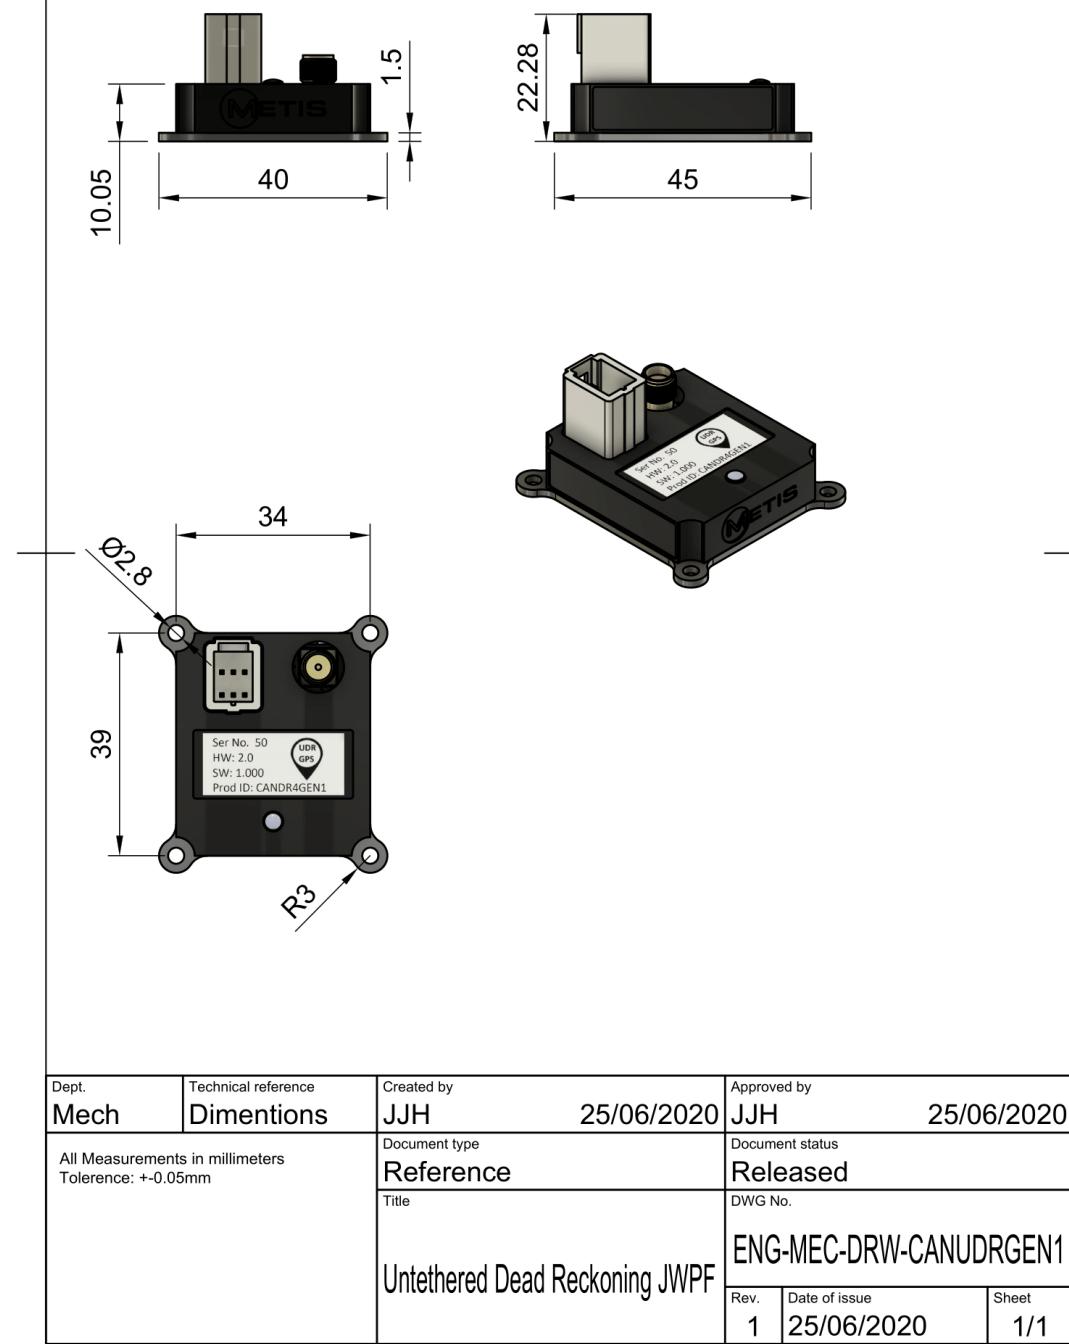


FIGURE 3 JWPF SENSOR DIMENSIONS

R&D 50 Hz GPS CAN Sensor User Manual

Pigtail Dimensions

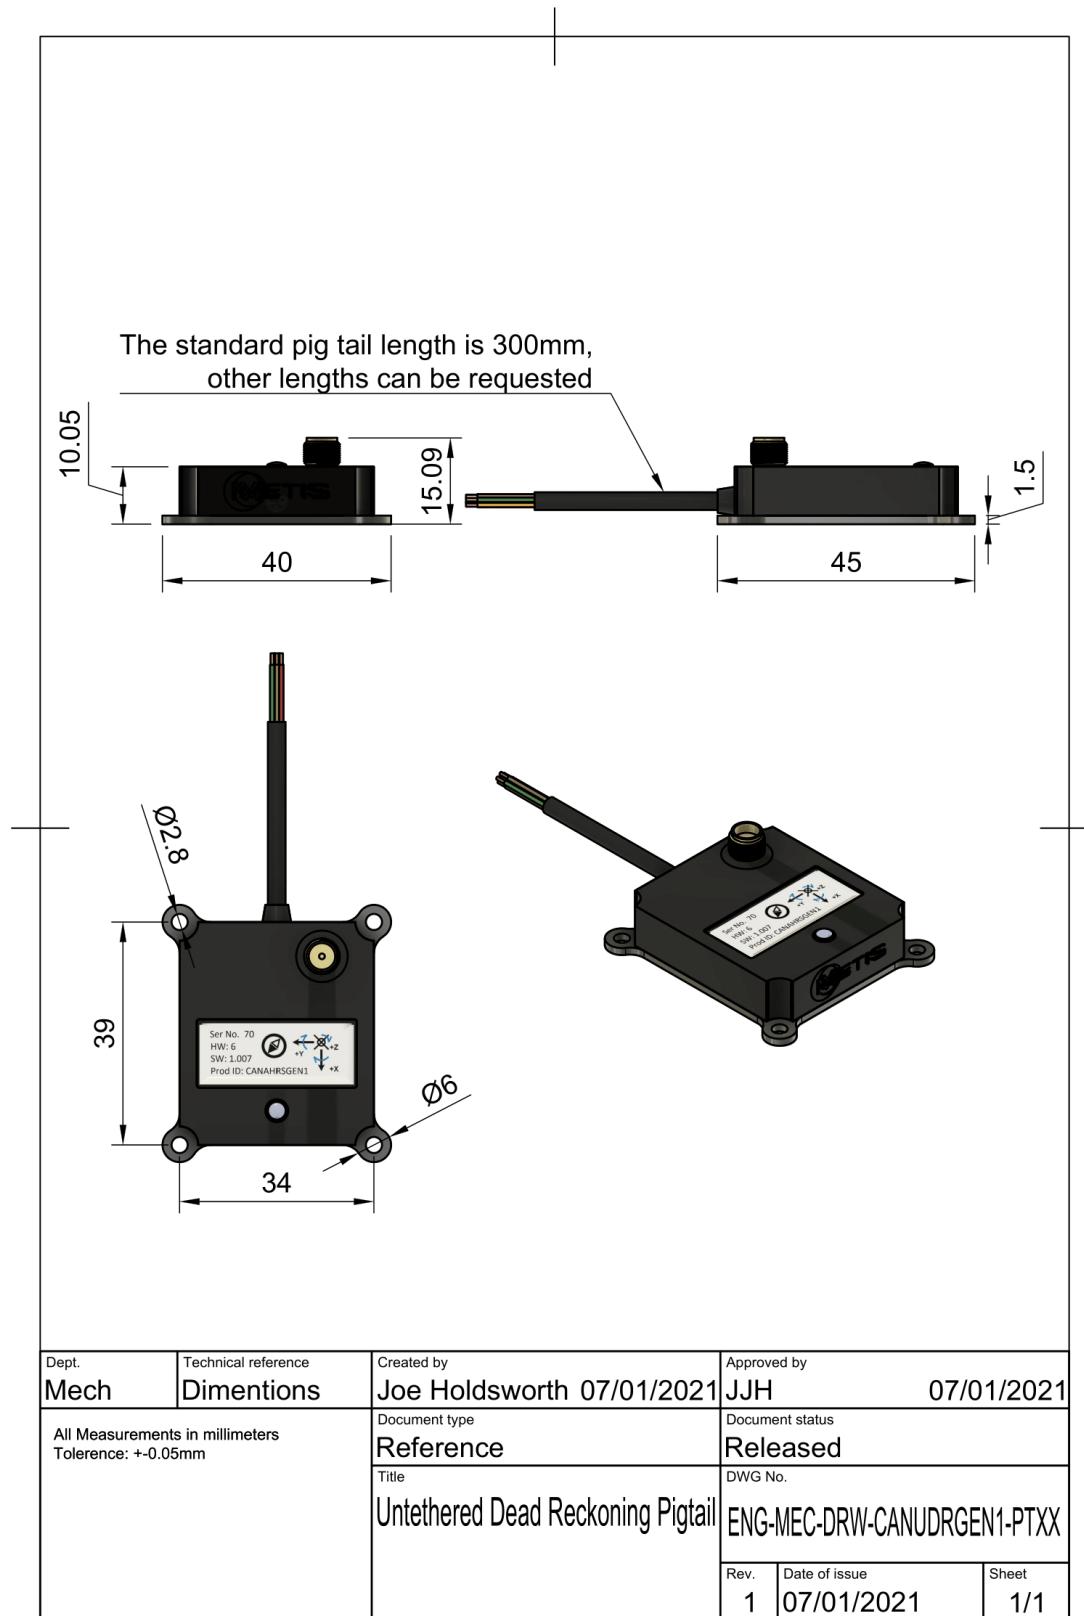


FIGURE 4 PIGTAIL SENSOR DIMENSIONS

R&D 50 Hz GPS CAN Sensor User Manual

Installation

Ensure that the GPS antenna is rigidly mounted and has a clear view of the sky.

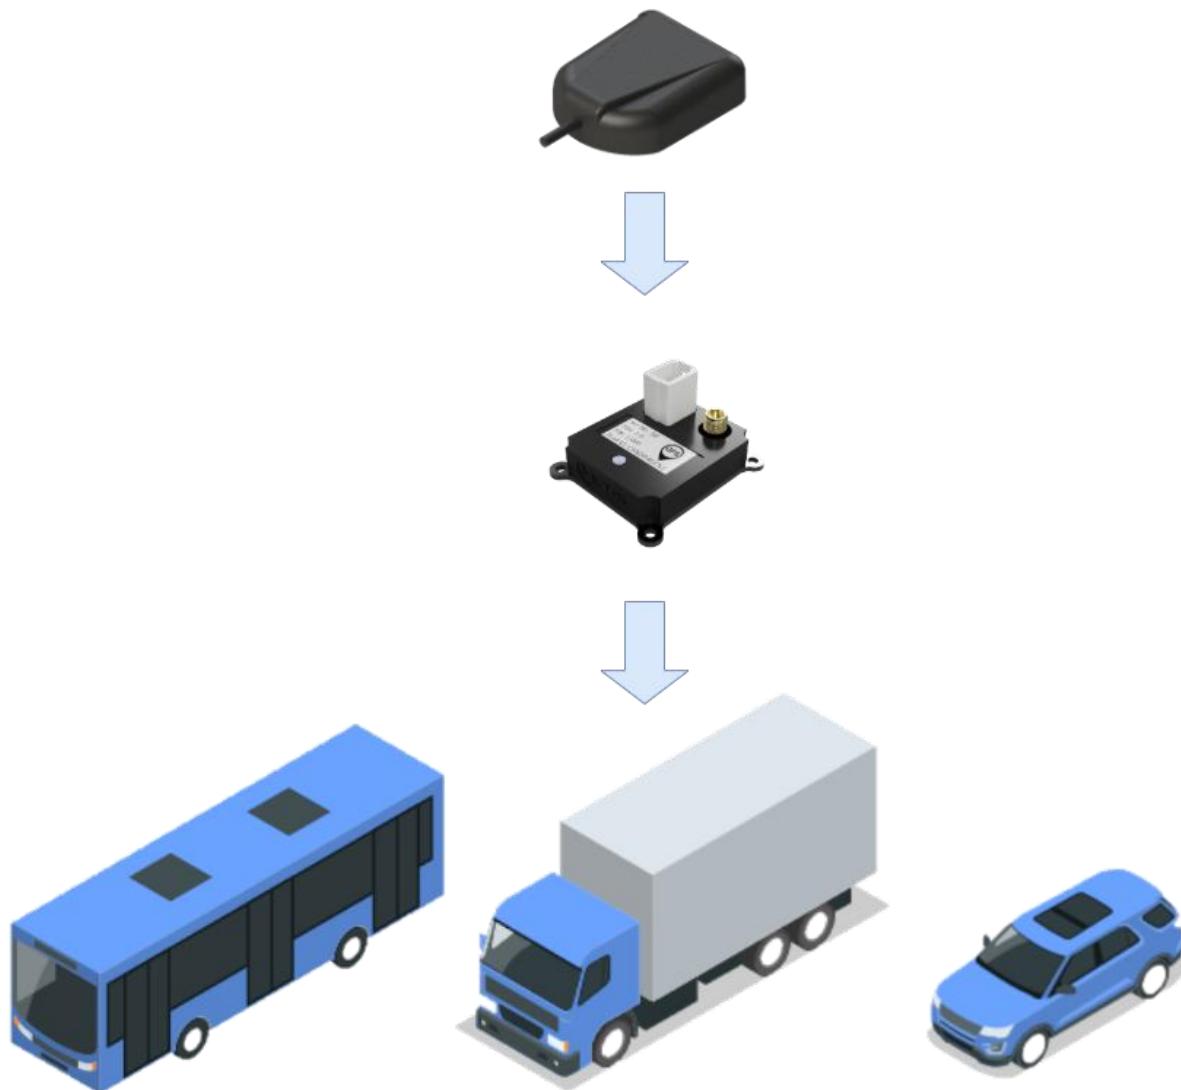


FIGURE 5 SUGGESTED MECHANICAL INSTALLATION ORIENTATION

Sensor Calibration

Calibration

No Calibration is required

Status LED



FIGURE 6 STATUS LED LOCATION

LED Colour	Blink Pattern	Meaning	Position update rate
White	1Hz	Factory Reset	NA
Red	1Hz	CAN Internal Error	NA
Red	2Hz	UDR Internal Error	NA
Blue	1Hz	No GNSS or 2D Fix	NA
Blue	solid	GNSS 3D fix	up to 50Hz
Green	solid	GNSS 3D fix with DGNSS	up to 50Hz

TABLE 5 LED STATUS

CAN Interface

Quick Start Guide

This section gives a quick overview of how to change settings on the device.

To see Default settings the unit ships with please refer to the CAN Message Summary section.

Step 1: Power Up Unit

Make sure power and CAN is connected to the device using the pin outs previously described in the **Error! Reference source not found.** section

If the CAN bus is unterminated or the unit is the only node on the CAN bus, please place a 120Ohm resister between CAN high and CAN low lines. The metis CAN development kit is useful for this.

Apply 9-14VDC to the unit at >=120mA.

Step 2: Connect CAN Tool

Ideally use a CAN tool such as PCAN or CANalyser.

Make sure the CAN bus connection settings in the tool match the settings specified in the unit's default settings section, i.e. 11bit address and 1MBit CAN bus speed.

Import the unit's dbc or symbols file into your CAN tool.

Start the CAN interface on your Computer.

You should now see the CAN Heartbeat message coming from the unit and other CAN Devices that may be on the bus. If you don't, then check the following;

1. The unit has power;
2. Your CAN tools connection settings are correct;
3. The CAN bus is terminated correctly;
4. CAN high and low are the right way round.

Step 3: What you should see

Figure 6 shows the default message output from the unit. Please take note of the Unique ID value and the Key value.

You will need to use these numbers when entering Setup mode or saving any changes to the setup.

Please be aware that the Key value changes each time a valid enter setup command has been received.

R&D 50 Hz GPS CAN Sensor User Manual

The screenshot shows two tables of CAN messages. The top table, titled 'Receive', lists four messages from Bus 1:

- Message 1: CAN-ID (hex) 300, Length 8, Symbol METIS_AHRS_Config.0x00_Heartbeat. Data: UniqueID = 1622398, Status = Run, Key = 6198, UnitType = Unknown.
- Message 2: CAN-ID (hex) 301, Length 8, Symbol METIS_AHRS_EulerAngles. Data: Pitch = -27.8 deg, Roll = -51.7 deg, Yaw = 122.9 deg, Accuracy = High, YawAccuracy = 0.9 deg.
- Message 3: CAN-ID (hex) 302, Length 7, Symbol METIS_AHRS_Accelerometer. Data: XAccel = -0.44 g, YAccel = 0.67 g, ZAccel = -0.51 g, Accuracy = Medium.
- Message 4: CAN-ID (hex) 303, Length 6, Symbol METIS_AHRS_Gyro. Data: XRotation = 5.3 deg/sec, YRotation = 8.1 deg/sec, ZRotation = -1.5 deg/sec.

The bottom table, titled 'Transmit', lists two messages to Bus 1:

- Message 1: CAN-ID (hex) 300, Length 6, Symbol METIS_AHRS_Config.0x01_Cmd_Enter_Set... Data: UniqueID = 1622398, Key = 6198.
- Message 2: CAN-ID (hex) 300, Length 6, Symbol METIS_AHRS_Config.0x02_Cmd_Save_Set... Data: UniqueID = 1622398.

FIGURE 7 DEFAULT CAN MESSAGE OUTPUT

If you want to change any settings move to step 4. If not move to step 7 and calibrate the device.

Step 4: Enter Setup mode

The Heartbeat message should give:

1. A Unique ID value.
2. A Key value.
3. The unit type sending the heartbeat message.
4. The run mode, this should be 'Run' if the unit has just powered up.

Take note of both the Unique ID value and the Key value.

Create a Enter Setup Mode message and populate the Unique ID field and Key field with the values noted from the heartbeat message.

Send the 'Enter Setup Mode' Command to the unit, this should only be sent once.

The next Heartbeat message received from the unit should have the run mode changed to 'Unit in Setup mode'. If this is not the case check your unique ID and Key value match those in the heartbeat message.

Once in setup mode you can configure the unit.

Any changes that have been made will not be applied until a 'Save Setup' command has been sent.

To cancel any changes prior to the 'Save Setup' command, send a the 'Cancel Setup' command or power cycle the device.

Step 5: Save Setup

To apply any configuration changes, send the 'Save Setup' command with the Unique ID and Key value field populated with the current value in the heartbeat message.

R&D 50 Hz GPS CAN Sensor User Manual

Note: The Key value changes each time a successful message with one in has been received.

Any changes to the unit will not be applied until a 'Save Setup' command has been sent.

Step 6: Reset to factory defaults

If for any reason you want to restore factory settings or you do not appear to be able to communicate with the device you can connect the factory reset pin to the power supply voltage and then power cycle the device.

If you still have CAN communication, you can also send a factory reset command to the unit.

R&D 50 Hz GPS CAN Sensor User Manual

CAN Message Format

Can Messages Identifier: 11bit

Data Format (all messages): Intel.

Termination: Unterminated (no 120 Ohm termination resistor)

Default CAN Bus Speed: 1MBps

Default CAN Start Address (decimal): 0x310 (784)

CAN Message Summary

The unit uses up to 5 CAN message ID's.

When configuring the CAN start address in the unit's settings it configures the start address of the Configuration message, other message addresses from the unit will have an offset from the start address.

Default CAN Address Hex (Deciaml)	Message Name	Description	Frequency Sent from Unit	Frequency To Unit	Default On or Off
0x31E	GPS50_Config	Used to send and receive configuration settings and values from the unit. This address is also used by the unit to send its heart beat message. Functionality is selected by changing the multiplexor value field in this message	1000ms (Heartbeat)	User dependant	On
0x31F [1 + Config Address]	GPS50_Lat_Long	Latitude and Longitude in decimal degrees	50ms (default) to 50ms	NA	On
0x320 [2 + Config Address]	GPS50_AltSpeedCOG	Altitude (m), Speed (m/s), Course Over Ground (degrees), Satellite Count, Unit Mode, Position Dilution Of Precision/PDOP	50ms (default) to 50ms	NA	On
0x321 [3 + Config Address]	GPS50_Date_Time	Date and time	1000ms	NA	On

TABLE 6 CAN MESSAGE OUTPUT SUMMARY

R&D 50 Hz GPS CAN Sensor User Manual

GPS 50 Config (0x31E[default])

Configuration CAN Message

CAN ID: Please see unit's default CAN start address details in the unit specific CAN message section.

Overview: This CAN message is used to send configuration commands to the unit and is also used to receive configuration data from the unit. To put the unit into Setup mode and any other commands CAN messages must be sent to this CAN address. The different Commands sent to this address are selected by changing the Message Type Field.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	The unit's unique identifier, enabling the user to distinguish between multiple unit's on the same CAN bus.
3	Unsigned 8 bit integer	Message Type	<p>This field is a multiplexor used to identify the message type.</p> <p>Mux values 0x00(0) to 0x29(41) are common across all units. Please refer to the common CAN message section.</p> <p>Mux values 0x30(42) to 0xFF(255) change depending on what particular type the unit is being used. Please refer to the unit specific CAN message section.</p>
4-7 (length can vary depending on message type)	Variable	Variable	The remaining 4 bytes are used depending on the command or data being sent back from the unit, not all 8 bytes are populated in every message.

TABLE 7:CAN CONFIGURATION MESSAGE

R&D 50 Hz GPS CAN Sensor User Manual

Common CAN Message Types

Overview: These are the multiplexor message ID's that populate byte 3 of the configuration CAN message. The multiplexor messages highlighted below in grey only work if the unit is in Setup mode.

Hex (Decimal) Value	Purpose	CAN dbc Name	Description
0x00 (0)	Heartbeat	0x00_Heartbeat	Message that gets sent out to indicate the unit is alive on the CAN bus, its status and what the unit type is.
0x01 (1)	Enter Setup	0x01_Cmd_Enter_Setup	Command sent to unit to put it into setup mode, the unit needs to be in setup mode to make any configuration changes to the unit.
0x02 (2)	Save Setup	0x02_Cmd_Save_Setup	Command to save any configuration changes that have been made whilst the unit was in Setup mode. In order to apply any configuration changes this needs to be sent. The unit reboots after this message is sent.
0x03 (3)	Cancel Setup	0x03_Cmd_Cancel_Setup	Command to cancel any changes that have been made in the current Setup mode.
0x04 (4)	Reset Unit to Factory Defaults	0x04_Cmd_Rst_to_Factory_Defaults	Resets the unit to factory defaults.
0x05 (5)	Get the CAN bus speed	0x05_Cmd_Get_CAN_Bus_Speed	Request the unit to send the current CAN bus speed. [1]
0x06 (6)	Set the CAN bus speed	0x06_Cmd_Set_CAN_Bus_Speed	Set the unit's CAN bus speed.
0x07 (7)	CAN bus speed response	0x07_Resp_CAN_Bus_Speed	The unit's response message indicating the current CAN bus speed.[1]
0x08 (8)	Get the CAN start address	0x08_Cmd_Get_CAN_Start_Address	Request the unit to send the current CAN start address. [1]
0x09 (9)	Set the CAN start address	0x09_Cmd_Set_CAN_Start_Address	Set the unit's CAN bus start address.
0x0A (10)	CAN bus start address response	0x0A_Resp_CAN_Start_Address	The unit's response message indicating the current CAN bus start address for the unit.[1]
0x0B (11)	Get unit sleep mode	0x0B_Cmd_Get_Sleep_Mode	Request the unit to send the current sleep mode of the unit. [2]
0x0C (12)	Set unit sleep mode	0x0C_Cmd_Set_Sleep_Mode	Set the unit's sleep mode.
0x0D (13)	Sleep mode response	0x0D_Resp_Sleep_Mode	The unit's response message indicating the sleep mode of the unit.[2]
0x0E (14)	Reboot the unit	0x0E_Cmd_Reboot_Device	Reboot the unit
0x0F (15)	Get the unit software version	0x0F_Cmd_Get_Software_Version	Get the software version on the unit
0x10 (16)	Software version response	0x10_Resp_Software_Version	The unit's response message to the software version on the device.

TABLE 8 CONFIGURATION MESSAGE TYPES

[1] If the value has been reconfigured but not saved the unit will send the reconfigured value.

[2] Sleep mode not available on this model.

R&D 50 Hz GPS CAN Sensor User Manual

Heartbeat (0x00_Heartbeat)

Mux Value Hex (Decimal): 0x00 (0)

Type: Transmitted from unit

Frequency: 1000ms

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x00 – Heartbeat
4-5	Unsigned 16 bit integer	Key	This value is used to enter Setup mode, save setup or restore the unit back to factory defaults. Values Range from 1 to 10000.
6	Unsigned 8 bit integer	Status	The status of the unit: 1. Run – normal operation, no configuration changes can be made. 2. Unit in Setup mode – configuration can be changed.
7	Unsigned 8 bit integer	Unit Type	The type of unit attached to the bus e.g. a value of 0x00 is a standard CAN IMU unit. Please see CAN unit types section for a complete list.

Enter Setup Command (0x01_Cmd_Enter_Setup)

Mux Value Hex (Decimal): 0x01 (1)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: Sending this command with the correct Key value puts the unit into Setup mode. Until the unit is in Setup mode no configuration options can be changed.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x01 – Enter setup command
4-5	Unsigned 16 bit integer	Key	This value in this field must be the same as the Key value in the heartbeat message for the command to be accepted. The key value will change each time a correct one has been received.

Save Setup Command (0x02_Cmd_Save_Setup)

Mux Value Hex (Decimal): 0x02 (2)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: Sending this message with the correct key value in the key field will save any configuration changes that have been made during Setup mode.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x02 – Save setup command

R&D 50 Hz GPS CAN Sensor User Manual

4-5	Unsigned 16 bit integer	Key	This value in this field must be the same as the Key value in the heartbeat message for the command to be accepted. The key value will change each time a correct one has been received.
-----	-------------------------	-----	---

Cancel Setup Command (0x03_Cmd_Cancel_Setup)

Mux Value Hex (Decimal): 0x03 (3)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: Sending this message will exit any current Setup mode and **not** save any changes.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x03 – Cancel setup command

Reset Unit To Factory Default Settings (0x04_Cmd_Rst_to_Factory_Defaults)

Mux Value Hex (Decimal): 0x04 (4)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: Sending this message and a valid Key will reset the unit to factory default settings, unit does not need to be in setup mode for this to work.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x04 – Restore to Factory Defaults command
4-5	Unsigned 16 bit integer	Key	This value in this field must be the same as the Key value in the heartbeat message for the command to be accepted. The key value will change each time a correct one has been received.

Get CAN Bus Speed (0x05_Cmd_Get_CAN_Bus_Speed)

Mux Value Hex (Decimal): 0x05 (5)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message only works if the unit is in Setup mode. If this CAN message is sent the unit will respond with the configured CAN bus speed.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x05 – Get CAN bus speed command

Set CAN Bus Speed (0x06_Cmd_Set_CAN_Bus_Speed)

Mux Value Hex (Decimal): 0x06 (6)

Type: Sent to unit

Frequency: NOT APPLICABLE

R&D 50 Hz GPS CAN Sensor User Manual

Description: This message only works if the unit is in Setup mode. This will set the CAN bus speed.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x06 – Set CAN bus speed command
4	Unsigned 8 bit integer	CAN bus speed	The below values in this field correspond to the following CAN speeds: 0 = 1000kbps (default) 1 = 800kbps 2 = 500kbps 3 = 250kbps 4 = 125kbps

Received CAN Bus Speed (0x07_Resp_CAN_Bus_Speed)

Mux Value Hex (Decimal): 0x07 (7)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This message only works if the unit is in Setup mode. This is a units response to a set or get CAN Bus Speed message.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x07 – CAN bus speed
4	Unsigned 8 bit integer	CAN bus speed	The below values in this field correspond to the following CAN speeds: 0 = 1000kbps (default) 1 = 800kbps 2 = 500kbps 3 = 250kbps 4 = 125kbps

Get CAN start address (0x08_Cmd_Get_CAN_Start_Address)

Mux Value Hex (Decimal): 0x08 (8)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message only works if the unit is in Setup mode. If this CAN message is sent the unit will respond with the configured CAN start address, the start address is the Configuration Message and Heartbeat CAN address, any CAN messages specific to the unit's functions will be sent consecutively after this address.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x08 – get CAN start address

R&D 50 Hz GPS CAN Sensor User Manual

Set CAN start address (0x09_Cmd_Set_CAN_Start_Address)

Mux Value Hex (Decimal): 0x09 (9)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message only works if the unit is in Setup mode. If this CAN message is sent the unit it will set the new CAN start address and respond with the configured CAN start address. The start address is the Configuration CAN address, any CAN messages specific to the unit's functions will be sent consecutively after this address.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x09 – set CAN start address
4 - 5	Unsigned 11 bit integer	CAN address	A value between 0x000 (0) to 0x7FF (2047), this is the theoretical maxIMUM start address, but this will actually be determined by the number of CAN addresses used up by the unit. MaxIMUM start address = 2047 – number of CAN addresses used.

Received CAN Start Address (0x0A_Resp_CAN_Start_Address)

Mux Value Hex (Decimal): 0x0A (10)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is the unit's response to a set or get CAN Bus start address message

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x0A – CAN start address
4 – 5	Unsigned 11 bit integer	CAN address	A value between 0x000 (0) to 0x7FF (2047), this is the theoretical maxIMUM start address, but this will actually be determined by the number of CAN addresses used up by the unit. MaxIMUM start address = 2047 – number of CAN addresses used.

Reboot Device (0x0E_Cmd_Reboot_Device)

Mux Value Hex (Decimal): 0x0E (14)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: Sending this message and a valid Key value will reboot the device.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x0E – Reboot device command
4-5	Unsigned 16 bit integer	Key	This value in this field must be the same as the Key value in the heartbeat message for the command to be accepted. The key value will change each time a correct one has been received.

R&D 50 Hz GPS CAN Sensor User Manual

Get Software Version (0x0F_Cmd_Get_Software_Version)

Mux Value Hex (Decimal): 0x0F (15)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message only works if the unit is in Setup mode. If this CAN message is sent the unit will respond with the configured sleep mode.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x0F – Get unit's software version

Software Version Response (0x10_Resp_Software_Version)

Mux Value Hex (Decimal): 0x10 (16)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is a unit's response to a get software version message

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x10 – set CAN start address
4 - 7	Float 32bit	Software Version	The unit reported software version.

GPS 50 Settings

This section documents CAN messages used to configure settings for the GPS 50. To change any settings the unit needs to be in Setup mode.

Get Position Update Rate (x30_Cmd_Get_Pos_Update_Rate_Hz)

Mux Value Hex (Decimal): 0x30 (48)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: If this CAN message is sent the unit will respond with the configured CAN message update rate in Hz of the units position and speed messages.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x30 – Get unit's position update rate

Set Position Update Rate (x31_Cmd_Set_Pos_Update_Rate_Hz)

Mux Value Hex (Decimal): 0x31 (49)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message configures the unit's CAN message update rate in Hz of the position and speed messages.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x31 – Set unit's rotation update rate
4 - 5	Unsigned 16 bit integer	Update Rate	1Hz to 50Hz (20Hz is default)

Position Update Rate Response (x32_Resp_Pos_Update_Rate_Hz)

Mux Value Hex (Decimal): 0x32 (50)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is the unit's response to a set or get rotation update rate.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x32 – rotation update rate response message
4 - 5	Unsigned 16 bit integer	Update Rate	1Hz to 50Hz (20Hz is default)

R&D 50 Hz GPS CAN Sensor User Manual

Get Lat Long CAN message output on or off (x3F_Cmd_Get_Lat_Lon_On)

Mux Value Hex (Decimal): 0x3F (63)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: If this CAN message is sent the unit will respond with if the Lat Long CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x3F – Get Lat Long CAN message setting on or off

Set Lat Long CAN message output on or off (x40_Cmd_Set_Lat_Lon_On)

Mux Value Hex (Decimal): 0x40 (64)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message configures if the unit's Lat Long CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x40 – Set unit's Lat Long message on or off
4	Unsigned 8 bit integer	On or Off	0 = off (default) 1 = on

Lat Long CAN message output on or off Response (x41_Resp_Lat_Lon_On)

Mux Value Hex (Decimal): 0x41 (65)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is response to a set or get Lat Long CAN message on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x41 – Lat Long on/off response message
4	Unsigned 8 bit integer	On or Off	0 = off (default) 1 = on

R&D 50 Hz GPS CAN Sensor User Manual

Get SOG and COG CAN message output on or off (x42_Cmd_Get_Alt_SOG_COG_On)

Mux Value Hex (Decimal): 0x42 (66)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: If this CAN message is sent the unit will respond with if the SOG and COG CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x42 – Get message setting on or off

Set SOG and COG CAN message output on or off (x43_Cmd_Set_Alt_SOG_COG_On)

Mux Value Hex (Decimal): 0x43 (67)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message configures if the unit's SOG and COG CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x43 – Set message to on or off
4	Unsigned 8 bit integer	On or Off	0 = off 1 = on (default)

SOG and COG CAN message output on or off Response (x44_Resp_Alt_SOG_COG_On)

Mux Value Hex (Decimal): 0x44 (68)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is the unit's response to a set or get SOG and COG CAN message on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x44 –on or off response message
4	Unsigned 8 bit integer	On or Off	0 = off 1 = on (default)

R&D 50 Hz GPS CAN Sensor User Manual

Get Date Time CAN message output on or off (x45_Cmd_Get_Date_Time_On)

Mux Value Hex (Decimal): 0x45 (69)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: If this CAN message is sent the unit will respond with if the Date Time CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x45 – Get message setting on or off

Set Date Time CAN message output on or off (x46_Cmd_Set_Date_Time_On)

Mux Value Hex (Decimal): 0x46 (70)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message configures if the unit's CAN message is on or off.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x46 – Set if message is on or off
4	Unsigned 8 bit integer	On or Off	0 = off 1 = on (default)

R&D 50 Hz GPS CAN Sensor User Manual

Get Hours Offset (x54_Cmd_Get_Hrs_Offset)

Mux Value Hex (Decimal): 0x54 (84)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: If this CAN message is sent the unit will respond with the hours offset to the date time message

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x54 – Get hours offset

Set Hours Offset (x55_Cmd_Set_Hrs_Offset)

Mux Value Hex (Decimal): 0x55 (85)

Type: Sent to unit

Frequency: NOT APPLICABLE

Description: This message configures the unit's hours offset in the date time message.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x55 – Set Euler pitch offset in degrees
4	Signed 8 bit integer	Offset	-12 to +12

Hours Offset Response (x56_Resp_Hrs_Offset)

Mux Value Hex (Decimal): 0x56 (86)

Type: Transmitted from unit

Frequency: NOT APPLICABLE

Description: This is the unit's response to a set or get hours offset command.

Layout:

Byte(s)	Data Type	Name	Description
0 – 2	Unsigned 24 bit integer	Unique ID	Unique ID
3	Unsigned 8 bit integer	Message Type	0x56 – Euler yaw inverted is on or off response
4	Signed 8 bit integer	Offset	-12 to +12

R&D 50 Hz GPS CAN Sensor User Manual

GPS50_Lat_Long (0x31F [default])

Default settings:

- CAN Start Address + 1 = (0x31F by default)
- Output is set to on
- Output rate is set to 4Hz
- CAN Message Output Rate Range: 1 to 50Hz

Overview: This CAN message is used to output the unit's latitude and longitude in decimal degrees.

Layout:

Byte(s)	Data Type	Name	Description
0 – 3	Decimal 32 bit	Latitude	Latitude in decimal degrees
4-7	Decimal 32 bit	Longitude	Longitude in decimal degrees

R&D 50 Hz GPS CAN Sensor User Manual

GPS50_AltSpeedCOG (0x320 [default])

Default settings:

- CAN Start Address + 2 = (0x320 by default)
- Output is set to on
- Output rate is set to 4Hz

CAN Message Output Rate Range: 4 to 20Hz

Overview: This CAN message is used to output the unit's speed, altitude, course over ground and fix status

Layout:

Byte(s)	Data Type	Name	Description																		
0 – 1	Decimal 16 bit	Altitude	Altitude relative to sea level in meters Range from -100 to + 6453.5m Precision = 0.1m																		
2-3	Decimal 16 bit	Course Over Ground (COG)	Course over ground in degrees Range from 0 to 360 degrees Precision = 0.1 degree																		
4-5	Decimal 16 bit	Speed	Speed in m/s Range from 0 to 6553.5 m/s Precision = 0.1 m/s																		
6 [bits 0 to 2]	Unsigned 3 bit int	Dead Reckoning Mode	The units fix status 0="No Fix", // no gps 1="2D Fix", 2="3D Fix", 3="3D Fix + DGNSS",																		
6[bits 3 to 7]	Unsigned 5 bit int	Satellite Count	The number of satellites locked to Max is 31																		
7	Unsigned 5 int	Positional Dilution Of Precision (PDOP)	<p>Unitless number that indicates positional accuracy</p> <table> <tr> <td>1</td> <td>Ideal</td> <td>Highest possible confidence level to be used for applications demanding the highest possible precision at all times.</td> </tr> <tr> <td>1-2</td> <td>Excellent</td> <td>At this confidence level, positional measurements are considered accurate enough to meet all but the most sensitive applications.</td> </tr> <tr> <td>2-5</td> <td>Good</td> <td>Represents a level that marks the minimum appropriate for making accurate decisions. Positional measurements could be used to make reliable in-route navigation suggestions to the user.</td> </tr> <tr> <td>5-10</td> <td>Moderate</td> <td>Positional measurements could be used for calculations, but the fix quality could still be improved. A more open view of the sky is recommended.</td> </tr> <tr> <td>10-20</td> <td>Fair</td> <td>Represents a low confidence level. Positional measurements should be discarded or used only to indicate a very rough estimate of the current location.</td> </tr> <tr> <td>>20</td> <td>Poor</td> <td>At this level, measurements are inaccurate by as much as 300 meters with a 6-meter accurate device (50 DOP x 6 meters) and should be discarded.</td> </tr> </table>	1	Ideal	Highest possible confidence level to be used for applications demanding the highest possible precision at all times.	1-2	Excellent	At this confidence level, positional measurements are considered accurate enough to meet all but the most sensitive applications.	2-5	Good	Represents a level that marks the minimum appropriate for making accurate decisions. Positional measurements could be used to make reliable in-route navigation suggestions to the user.	5-10	Moderate	Positional measurements could be used for calculations, but the fix quality could still be improved. A more open view of the sky is recommended.	10-20	Fair	Represents a low confidence level. Positional measurements should be discarded or used only to indicate a very rough estimate of the current location.	>20	Poor	At this level, measurements are inaccurate by as much as 300 meters with a 6-meter accurate device (50 DOP x 6 meters) and should be discarded.
1	Ideal	Highest possible confidence level to be used for applications demanding the highest possible precision at all times.																			
1-2	Excellent	At this confidence level, positional measurements are considered accurate enough to meet all but the most sensitive applications.																			
2-5	Good	Represents a level that marks the minimum appropriate for making accurate decisions. Positional measurements could be used to make reliable in-route navigation suggestions to the user.																			
5-10	Moderate	Positional measurements could be used for calculations, but the fix quality could still be improved. A more open view of the sky is recommended.																			
10-20	Fair	Represents a low confidence level. Positional measurements should be discarded or used only to indicate a very rough estimate of the current location.																			
>20	Poor	At this level, measurements are inaccurate by as much as 300 meters with a 6-meter accurate device (50 DOP x 6 meters) and should be discarded.																			

R&D 50 Hz GPS CAN Sensor User Manual

GPS50_Date_Time (0x321 [default])

Default settings:

- CAN Start Address + 3 = (0x321 by default)
- Output is set to on
- Output rate is set to 1000ms

CAN Message Output Rate Range: 1000ms

Overview: This CAN message is used to output the unit's date and time.

Layout:

Byte(s)	Data Type	Name	Description
0 – 1	Unsigned 16 bit	Year	Max 65535
2	Unsigned 8 bit	Month	
3	Unsigned 8 bit	Day	
4	Unsigned 8 bit	Hour	0 to 24
5	Unsigned 8 bit	Minutes	
6	Unsigned 8 bit	Seconds	

R&D 50 Hz GPS CAN Sensor User Manual

List of Tables

Table 1 Sensor Performance	6
Table 2 Environmental Performance Information	6
Table 3 Electrical Performance	7
Table 4 Connection Information	7
Table 5 LED status.....	13
Table 6 CAN Message Output Summary.....	17
Table 7:CAN Configuration Message	18
Table 8 Configuration Message Types	19

R&D 50 Hz GPS CAN Sensor User Manual

List of Figures

Figure 2 Mating Connector Pin Numbering (Top Down View)	8
Figure 3 connector Crimp Details.....	8
Figure 4 JWPF Sensor Dimensions	10
Figure 5 Pigtail Sensor Dimensions	11
Figure 6 Suggested Mechanical Installation Orientation	12
Figure 7 Status LED Location	13
Figure 8 Default CAN message output	15

End of Document